



Micron Filtration Limited

www.micronfiltration.co.uk

Micron Filtration Limited
13 Laburnum
St Helens
WA11 9DZ

Office No: 01744 757735
Mobile: 07713 871893
E-Mail: sales@micronfiltration.co.uk


FEATURES:

1. Applicable to both ferrous and non-ferrous particles.
2. Filter paper moves forward automatically when contaminants accumulate and clog it.
3. Filtration effect depends on paper accuracy. Standard Grades Are 50 μ , 30 μ and 15 μ . (Other Micron Ratings Are Available)
4. Not suitable for heavy machining for the sake of paper consumption. Use magnetic separator as a pre-filter to reduce paper consumption.



Gravity Paper Band Filter

APPLICATION:

- | | |
|---------------------------------------|---------------------------|
| 1. Surface Grinding Machine | 5. Tread Grinding Machine |
| 2. Centerless Grinding Machine | 6. Gear Grinding Machine |
| 3. Internal/External Grinding machine | 7. Polisher |
| 4. Honing machine | |

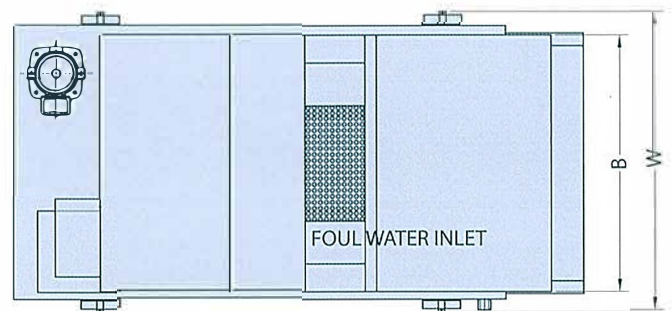

DIMENSION DIAGRAM

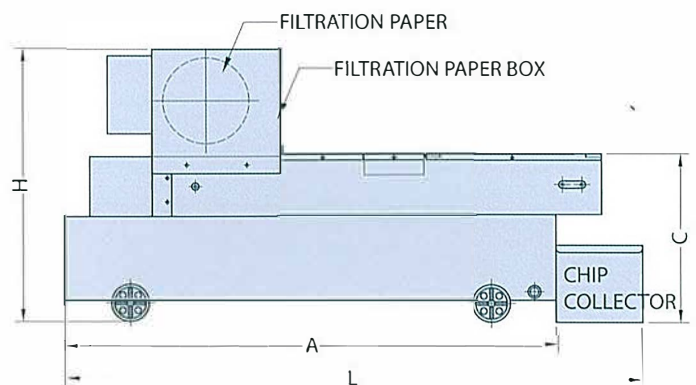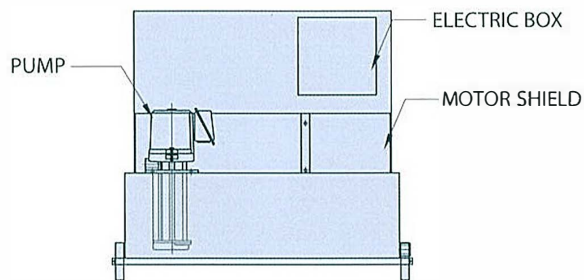

SPECIFICATION

MODEL	CAPACITY L/MIN	TANK VOL. (L)	L	A	B	C	W	H	PUMP (HP)		MOTOR	FILTER PAPER	Note
									HP	OUTLET			
20	20	100	1050	850	600	400	720	660	1/8	PF1/2"	25W	W: 500MM L: 90M	WHEEL
40	40	120	1200	1000	600	400	720	660	1/8	PF1/2"	25W		
60	60	140	1350	1150	600	400	720	660	1/8	PF1/2"	25W		
80	80	160	1500	1300	600	400	720	660	1/4	PF3/4"	25W		
120	120	210	1500	1300	800	400	920	740	1/2	PF3/4"	40W	W: 700MM L: 90M	NO WHEEL
160	160	260	1800	1600	800	400	920	740	1/2	PF3/4"	40W		
240	240	440	1550	1350	1060	430	1330	740	1	PF1"	60W		
360	360	640	2150	1950	1060	430	1330	740	1	PF1"	60W		
500	500	980	3240	2950	1060	430	1330	740	1X2	PF1"X2	60W	L: 90M	